

snorkel

 **snorkel**

Vigo Centre, Birtley Road
Washington, Tyne & Wear
NE38 9DA, UK


T +44 (0) 845 1550 057

F +44 (0) 845 1557 756

www.snorkellifts.com

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

PRODUCT RANGE OVERVIEW

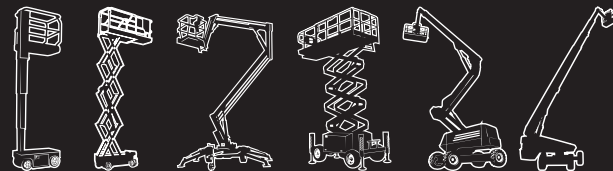



Snorkel is a leading global manufacturer of aerial work platforms. Our comprehensive range of aerial lifts provides safe and efficient working at height, from 4 metres to 40 metres. We have the right machine for any application, from interior building maintenance through to the toughest construction job site.

Tracing its roots back to 1946, Snorkel has a proud heritage of finding practical solutions to safely working at height. Our success is built on staying true to our core values, which influence everything we do. Above all, we believe in maintaining 100% focus on our customers.

We invented the first self-propelled scissor lift more than three decades ago and that spirit of innovation continues today. Snorkel is constantly finding new solutions to working at height and new ways to enhance the safety and productivity benefits delivered by aerial work platforms.

Snorkel's philosophy is "keep it simple" – we manufacture robust, reliable machines that take you to wherever you need to be, in the most efficient and safe manner possible. We build aerial lifts that

meet your needs without complicating your working life; Snorkel lifts are simple to use, simple to maintain and simple to repair.

We work hard to stay closer to our customers - the Snorkel team is augmented by more than 100 distributors and service agents across the world. Wherever you are, Snorkel can provide responsive, expert advice in your language, plus fast access to spare parts and product support.

Snorkel Global Finance offers a range of attractive options to enable you to purchase Snorkel machines, in a manner tailored to suit your individual business needs.

Find out more about our products and services at **www.snorkellifts.com**



PAM21/PAM26

The PAM Series are affordable, efficient push-around mast lifts that are easy to use and easy to maintain. Compact and lightweight, the PAM Series can be easily pushed into position – and fit through a standard doorway without the need for tilting.



UL25/UL32/UL40

The robust and compact UL Series push-around mast lifts easily pass through a standard doorway and offer a small outrigger footprint. Our patented Girder Lock mast delivers safe and stable working heights of up to 14m. Non-marking casters and an easy-loader system for easy transport come as standard.



SPM20

The SPM20 is perfect for working in tight spaces, with skid steer and a zero inside turning circle. Weighing just 850kg, the SPM20 delivers a working height of 8m and can lift 150kg. The machine has a top speed of 4km/h and fully elevates in just 27 seconds.

PERSONNEL LIFTS

Designed for contractors and facilities maintenance professionals, Snorkel Personnel Lifts are lightweight, low-cost, portable work platforms for interior use. Snorkel's patented Girder Lock mast design, utilised in the UL range, delivers superb stability and reach coupled with excellent lift capacity.

Snorkel PAM and UL Personnel lifts are easy to transport, can be moved around by one person and pass easily through a standard doorway. Erected in minutes, they are a fast and efficient alternative to scaffold towers, for working at heights of up to 14 metres.

Where the convenience of a self-propelled machine is preferred, the SPM20 offers a highly manoeuvrable, easy to drive lift with a working height of 8 metres.

	PAM21	PAM26	UL25	UL32	UL40	SPM20
max. working height	8.5m	10.0m	9.6m	11.7m	14.2m	8.0m
platform capacity (swl)	125kg	125kg	159kg	136kg	136kg	150kg
stowed height	1.98m	1.98m	1.99m	2.53m	2.90m	1.98m
overall length	1.20m	1.20m	1.26m	1.32m	1.32m	1.36m
overall width	0.69m	0.69m	0.74m	0.74m	0.74m	0.79m
gross weight (AC)	310kg	340kg	349kg	417kg	449kg	n/a
gross weight (DC)	365kg	390kg	367kg	435kg	467kg	850kg



M1230E
The original self-propelled telescopic mast lift remains popular the world over for its versatility, strength and durability. The Snorkel M1230E can be driven through standard doorways and carried in passenger elevators - yet will still lift two people with tools to a safe working height of 5.6 metres. It is ideal for a wide range of applications from construction and maintenance to retail.



S1930E/S1932E
The Snorkel S1930E delivers a working height of up to 7.6m and a platform capacity of 227kg. Compact and nimble, the S1930E has an inside turning radius of less than 130mm and can climb slopes of 25%. The S1930E is just 0.76m wide, so can easily pass through a standard European doorway. For additional flexibility, the S1932E is just 50mm wider, but 30kg lighter and is rated for outdoor use by one person.



S2632E/S2646E/S3246E
Designed for indoor construction and maintenance tasks, the S-E series electric scissors offer working heights up to 12m. The 10m working height model is available in a 0.81m wide version for confined spaces and a 1.16m wide version when more working area is required. Ideal for facilities maintenance, both the S2646E and S3246E can be used outdoors with a single operator on the platform.

S-E SERIES ELECTRIC SCISSOR LIFTS

Snorkel scissor lifts have tight turning circles for working in confined spaces, while roll-out deck extensions provide additional reach. Snorkel's smooth, proportional operating system gives you precise control where you need it most - and deep cycle batteries ensure your Snorkel electric lift keeps working as long as you do.

We originated the telescopic mast lift with the TM12, which remains an industry leader today as the Snorkel M1230E. And for job sites where pricing is the critical issue, Snorkel's SL20E sigma lift offers the most cost-effective self-propelled 8m lift in the world.

	M1230E	S1930E	S1932E	S2632E	S2646E	S3246E	SL20E
max. working height	5.6m	7.6m	7.6m	10.0m	10.0m	11.8m	8.1m
platform capacity (swl)	227kg	227kg	227kg	340kg	454kg	317kg	300kg
stowed height	1.70m	2.17m	2.17m	2.33m	2.36m	2.51m	1.95m
overall length	1.36m	1.85m	1.85m	2.37m	2.54m	2.54m	2.55m
overall width	0.76m	0.76m	0.81m	0.81m	1.16m	1.16m	0.77m
gross weight	780kg	1600kg	1570kg	2224kg	2359kg	3003kg	1200kg



SL20E

This battery-powered sigma lift delivers a great return on investment. Designed to be cost-competitive in the 8m scissor lift sector, the SL20E is a low-cost and versatile machine, with a spacious platform, excellent lift capacity and is extremely simple to maintain - ideal for demanding rental applications.

M1230E
S1930E
S1932E
S2632E
S2646E
S3246E
SL20E

ELECTRIC SCISSOR LIFTS



S2770RT/S3370RT

Lightweight and compact, the S2770RT/S3370RT are ideal for outdoor work in confined spaces between buildings. With excellent ground clearance and an articulating axle they can tackle rough terrain with ease, and come with auto level outriggers and a 1.2m deck extension as standard.



S2770BE/S3370BE

Suitable for exterior and interior work, this bi-energy version of the S2770RT/S3370RT delivers superb job site versatility. Work outdoors on the diesel engine, then switch to battery power for indoor tasks. Non-marking, high grip tyres suit all surfaces.



S3290RT/S4390RT/S5290RT

Engineered for maximum performance on construction sites, this rough terrain scissor family provides working heights up to 18m and can climb gradients of up to 50%. The spacious 1.8m x 6.6m deck can lift up to 680kg. Standard features include twin deck extensions, powerful 4 wheel drive and oscillating axles.

S-RT SERIES ROUGH TERRAIN SCISSOR LIFTS

Snorkel provides a full range of diesel-powered rough terrain scissor lifts, from compact machines through to twin deck construction scissors. The Snorkel S-RT series delivers excellent deck space, load capacity and superb terrain capabilities - all our lifts are equipped with four-wheel drive for rough terrain and can climb gradients of up to 50%.

Snorkel compact scissor lifts are also available in bi-energy, for the ultimate job site flexibility – work on a building's exterior, then take the same machine indoors for fitting out. Switching to battery power can also help you meet increasing laws and regulations on noise and emissions.

	S2770RT	S3370RT	S2770BE	S3370BE	S3290RT	S4390RT	S5290RT
max. working height	10.3m	12.1m	10.3m	12.1m	12.0m	15.0m	18.0m
platform capacity (swl)	580kg	450kg	580kg	450kg	680kg	680kg	680kg
stowed height	2.56m	2.70m	2.56m	2.70m	2.81m	2.98m	3.15m
overall length	3.36m	3.36m	3.36m	3.36m	4.88m	4.88m	4.88m
overall width	1.77m	1.77m	1.77m	1.77m	2.27m	2.27m	2.27m
gross weight	2930kg	3620kg	3150kg	3840kg	7500kg	7800kg	8700kg

S2770RT
S3370RT
S2770BE
S3370BE
S3290RT
S4390RT
S5290RT

ROUGH TERRAIN SCISSOR LIFTS



SL26SL SPEED LEVEL

The SL26SL provides a safe working load of 680kg and a working height of 10m. The spacious 1.7m x 3.7m platform comes with a deck extension for additional reach and more compact travel dimensions. With a fast travel speed and 3-mode drive, the lightweight SL26SL can cope with the most difficult terrain.



SL30SL SPEED LEVEL

The SL30SL provides a working height of up to 11m, on a spacious 1.7m x 4.2m high grip deck, with lift capacity of 590kg. Driveable at full height, with three drive modes for optimum torque and drive speed, the SL30SL can climb gradients of up to 50%. The Speed Level system can level the platform in seconds, without the use of outriggers – delivering excellent productivity benefits over a traditional rough terrain scissor lift.

SPEED LEVEL SERIES

When other machines can't make the grade, you can rely on the Snorkel Speed Level. This sigma lift can climb gradients of up to 50%, and offers automatic self-levelling without the need for stabilisers or outriggers. Combined with superb ground clearance, excellent lift capacity and powerful 4x4 drive, the Snorkel Speed Level can handle the toughest of job site conditions.

Our patented self-levelling system allows for fast and safe platform levelling on slopes, delivering 9° front-to-back and 13° side-to-side compound slope levelling capability. Ideal for construction and rough terrain applications, the Snorkel Speed Level is driveable at full height and has a platform capacity of up to 680kg. The Speed Level can even be driven when elevated on uniform, hard-surfaced slopes such as car park ramps.

	SL26SL	SL30SL
max. working height	10.0m	11.0m
platform capacity (swl)	680kg	590kg
stowed height	2.60m	2.60m
stowed length	3.79m	4.39m
width	2.13m	2.13m
gross weight	3085kg	3400kg

SL26SL
SL30SL

SPEED LEVEL SERIES



MB20J/MB26J

The ultra-narrow MB-series provides a superb working envelope in very confined interior spaces. Ideal for applications in tight spots which require "up and over" capabilities, the MB-series delivers 360° mast rotation, with the added outreach from the articulating jib.



A38E

Lightweight but durable and reliable, the A38E offers class-leading performance, with a working height of up to 13.5m and up to 6.1m of outreach. The up-and-over articulated boom design provides the operator with a superb working envelope. Smooth, one-hand proportional joystick control delivers precision in the air, while the slim 1.5metre-wide chassis and 400mm inside turning radius provides excellent manoeuvrability in confined spaces.



A46JE

This 2WD, battery-electric version of the A46 is a versatile boom lift capable of working to heights up to 16.1m. With a working outreach of 7.4m and a jib length of 1.5m, this self-propelled boom is a highly versatile performer. The spacious 1.8m x 1m platform can lift two people with tools and offers powered 180° rotation. Ideal for use in confined spaces, the A46JE has a class-leading inside turning radius of just 600mm.

ELECTRIC BOOM LIFTS

Snorkel's A-series of market-leading articulating boom lifts combine superb manoeuvrability with clean and quiet operation, delivering working heights of up to 16m from zero emission, battery-powered machines.

Designed for warehouse and retail environments, our MB series of versatile mast boom lifts are perfect for stock picking and for working at height in narrow store aisles, but equally at home in industrial maintenance applications.

	MB20J	MB26J	A38E	A46JE
max. working height	8.0m	10.0m	13.5m	16.1m
platform capacity (swl)	215kg	215kg	215kg	227kg
stowed height	1.98m	1.98m	2.00m	2.00m
stowed length	2.43m	2.80m	4.04m	5.43m
width	0.81m	1.00m	1.50m	1.75m
gross weight	2590kg	2660kg	3850kg	6486kg

MB20J
MB26J
A38E
A46JE

ELECTRIC BOOM LIFTS



A46JRT

This fast and powerful 4WD rough terrain lift is a leader in its class, delivering a working height of up to 16.3m and outreach of 7.4m. Designed for manoeuvrability in tight spaces, the A46JRT has an inside turning radius of just 600mm - and the boom operates with zero tail swing. The spacious 1.8m x 1m platform can lift two people with tools and the 1.5m jib offers additional flexibility.



A85JRT

The A85JRT is the largest model in the articulated boom range, with a working height of 27m and outreach of up to 18.9m. The superb "up and over" reach combined with a rotating jib, provide excellent aerial manoeuvrability while 4 wheel drive and 4 wheel steer make it a great performer on any job site.

A-SERIES ARTICULATING BOOM LIFTS

Designed for tough job sites, Snorkel's A-series of articulating boom lifts combine superb manoeuvrability with power and precision, delivering working heights of up to 27.7m and lift capacity for two people plus tools.

Our class-leading articulated boom lifts provide the ultimate working envelope, including superb "up and over" capabilities. Overcome obstacles up to 8.5m tall while still utilising up to 18.9m of outreach. Snorkel's smooth, proportional operating system gives you precise control where you need it most. Articulating jibs for extra manoeuvrability are fitted as standard, while the A85JRT adds jib rotation and 4-wheel steer to its extension list of features.

	A46JRT	A85JRT
max. working height	16.3m	27.7m
platform capacity (swl)	227kg	227kg
stowed height	2.20m	2.9m
stowed length	5.85m	12.5m
width	2.10m	2.6m
gross weight	6622kg	17500kg

A46JRT
A85JRT

ARTICULATING BOOM LIFTS



T40RT/T46JRT

The Snorkel T40RT telescopic boom lift delivers a working height of up to 14m and outreach of 10.2m. For additional flexibility, we offer the T46JRT, the same machine with an added 2m jib. The T46JRT delivers a working height of up to 16m and outreach of 12.2m. Designed for construction sites, the T46JRT has fast drive speed front and rear oscillating axles, four wheel drive and ground clearance of more than 35cm.



TB60RT/TB66JRT

The Snorkel TB60RT provides a working height of 20m and 15m of outreach. Designed for construction sites, the TB60RT has front and rear oscillating axles, four wheel drive and excellent ground clearance, while the spacious platform cage can be entered from three sides. For additional flexibility, we offer the TB66JRT, the same machine with a 2m jib, delivering a working height of 22m and outreach of 17m.



T80/T85J

The Snorkel T80 delivers a working height of 26.4m and outreach of 21.4m. Engineered for construction sites, four wheel drive and four wheel steer come as standard. For additional flexibility, we offer the T85J, the same machine with a 2m jib, providing a working height of 28m and outreach of 23.4m.

T-SERIES TELESCOPIC BOOM LIFTS

Snorkel's T-series telescopic boom lifts are designed for tough job sites and are built to last. Four wheel drive, powerful diesel engines and high torque drive motors combine to deliver superior performance. We engineer simplicity, delivering robust aerial lifts that are easy to operate and easy to maintain or service. Our dedication to safety, quality and operator comfort make Snorkel booms dependable performers in construction and industrial applications.

All are available as either a straight stick boom or with a jib for additional flexibility. Other features and options include power and air to platform, sand blast protection kit, cold weather start kit, platform lights and hydraulic generator, ensuring there is a Snorkel T-series machine for any job site.

	T40RT	T46JRT	TB60RT	TB66JRT	T80	T85J	T120	T126J
max. working height	14.2m	16.0m	20.3m	22.1m	26.4m	27.9m	38.6m	40.4m
platform capacity (swl)	272kg	227kg	227kg	227kg	227kg	227kg	227kg	272kg
stowed height	2.41m	2.40m	2.70m	2.70m	2.9m	2.90m	3.0m	3.20m
stowed length	7.57m	8.60m	9.4m	10.0m	11.8m	12.9m	12.9m	13.70m
width	2.44m	2.44m	2.5m	2.5m	2.6m	2.6m	2.6m	2.60m
gross weight	6486kg	7030kg	9857kg	11916kg	16480kg	17100kg	17917kg	19119kg

- T40RT
- T46JRT
- TB60RT
- TB66JRT
- T80
- T85J
- T120
- T126J



T120/T126J

The Snorkel T120 provides a working height of 36.6m and outreach of 17.2m. Engineered for construction sites, four wheel drive and four wheel steer come as standard, along with a fixed front axle and extendable rear axle. For additional flexibility, we offer the T126J, the same machine with a 2m jib, providing a working height of 40m and outreach of 19.2m.

T40RT
T46JRT
TB60RT
TB66JRT
T80
T85J
T120
T126J

TELESCOPIC BOOM LIFTS



TL34

The TL34 is a low cost entry level trailer boom, providing a working height of up to 12.2m and 5m of outreach. The standard, fold-down manual outriggers have a footprint of just 2.9m x 3.4m and the entire machine weighs only 1,300kg. The fully proportional hydraulic controls, powered by a 12v battery pack, are responsive and smooth, while also ensuring the TL34 is simple and cost-effective to maintain.



TL37J

The TL37J is a high specification trailer that offers excellent value for money. The articulating boom provides a working height of 13.2m and up to 5.9m of outreach. A 1.3m jib with 130° working arc and powered platform rotation provides additional manoeuvrability. Fully proportional live hydraulic controls ensure the TL37J is both simple to use and easy to service or maintain. Hydraulic outriggers are fitted as standard and a range of power options are available.



TL39

The TL39 is a tough yet compact articulating/telescopic trailer boom and offers a working height of 13.8m with 6.4m of outreach. Weighing under 1,700kg, this machine has a towing length of less than 5m. Hydraulic outriggers are standard, with the option of auto-levelling.



TL49J

This 17m trailer's articulating/telescopic boom and 140° jib offer a superb working envelope, providing class-leading outreach of 9.1 metres. Live hydraulic controls and heavy duty booms ensure the TL49J is a robust machine that is simple to operate, maintain and repair. A range of power options are available, including bi-energy.

TL-SERIES TRAILER-MOUNTED BOOM LIFTS

The Snorkel TL-series are high specification, rugged, reliable trailer-mounted boom lifts that are very cost-competitive. The machines are easy and low cost to maintain and simple to operate. Towable with most cars and light commercial vehicles, these are high performance machines that deliver a great return on investment.

Most TL-series lifts are available in a range of power options including petrol, diesel, electric and bi-energy. Options include air to platform, a 230V generator and platform work lights.

	TL34	TL37J	TL39	TL49J
max. working height	12.2m	13.2m	13.8m	17.0m
platform capacity (swl)	215kg	215kg	215kg	200kg
stowed height	2.20m	1.95m	2.20m	2.10m
towing length	5.20m	6.40m	4.90m	7.10m
towing width	1.50m	1.48m	1.60m	1.75m
gross weight	1300kg	1450kg	1694kg	2250kg

TL34
TL37J
TL39
TL49J

TRAILER-MOUNTED BOOM LIFTS